

Wireflow chandelier



VIBIA

0315

Design By Arik Levy


Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with twenty LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

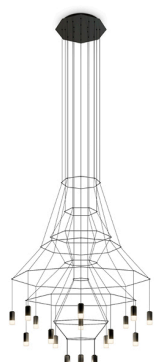

Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	● O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy

Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	20 x LED 4,48W 350mA 
LED	CR>90 9805 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 100~240 V V 50~60 Hz HZ
Remarks	Driver: 350mA / TCI / MAXI JOLLY US DALI 50 / 100/127V / 50/60Hz




Application	Hanging lamps
Packaging	2 Box 1,633 m x 1,619 m x 0,086 m Gross weight 27.2 Net weight 24.23 Vol. 0.3859

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	9805
Maximum Value	53.87

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Wireflow chandelier


VIBIA

0374




Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with 43 4.5W LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	04 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Horizontal rods: Steel Body: Aluminum Ceiling rose: Steel
Light source	43 x LED 4,48W 350mA 
LED	CRi>90 21082 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 100~240 V V 50~60 Hz HZ   Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0,775 m x 0,775 m x 0,46 m Gross weight 48,9 Net weight 41 Vol. 0.5035

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	39.81%
Coordinate System	CG
Total Flux	21082.00
Maximum Value	54.85

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Wireflow chandelier


VIBIA

0375

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with 43 4.5W LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

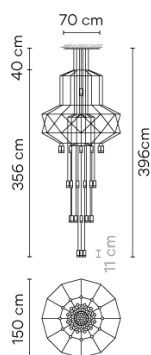


Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	04 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Horizontal rods: Steel Body: Aluminum Ceiling rose: Steel
Light source	43 x LED 4,48W 350mA D
LED	CRI>90 21082 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 100~240 V V 50~60 Hz HZ F Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0.775 m x 0.775 m x 0.46 m Gross weight 46.5 Net weight 42 Vol. 0.5035

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	39.80%
Coordinate System	CG
Total Flux	21082.00
Maximum Value	54.97

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Wireflow chandelier


VIBIA

0376





Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with 42 4.5W LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	42 x LED 4,48W 350mA 
LED	CR>90 20591 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 100~240 V V 50~60 Hz HZ   Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0,775 m x 0,775 m x 0,46 m Gross weight 50 Net weight 40 Vol. 0.5035

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	39.88%
Coordinate System	CG
Total Flux	20591.30
Maximum Value	54.83

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Wireflow chandelier


VIBIA

0377





Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with 42 4.5W LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	42 x LED 4,48W 350mA 
LED	CRI>90 20591 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 100~240 V V 50~60 Hz HZ   Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0.775 m x 0.775 m x 0.46 m Gross weight 53 Net weight 43 Vol. 0.5035

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	39.88%
Coordinate System	CG
Total Flux	20591.30
Maximum Value	54.74

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Wireflow chandelier


VIBIA

0378




Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with 42 4.5W LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	● O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	42 x LED 4,48W 350mA 
LED	CR>90 20591 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 100~240 V V 50~60 Hz HZ   Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0,775 m x 0,775 m x 0,46 m Gross weight 49 Net weight 44 Vol. 0.5035

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	39.88%
Coordinate System	CG
Total Flux	20591.30
Maximum Value	54.87

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com