







2013

Design By undefined

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle.

Model Sheet

Finish	<ul style="list-style-type: none">  36 Soft Pink NCS S 1010-Y50R  47 Green L1 NCS S 4005-G80Y  51 Matt gold leaf Gold  10 White NCS S 0300-N
LED temperature color	2700 K
Dimming	DALI 1-10V Push Optional Casambi Min. quantity, upcharge and extra lead time apply [EN]
Installation type	Surface Canopy
Materials	Shade: Aluminum Reflector: Aluminum Wall plate: Steel
Light source	6 x LED 4,48W 350mA E
LED	CRI>90 2942 lm 109 2700 K
Driver	CC - Constant Current 350 110-240 V 50/60 HZ
Remarks	Possible installation in ceiling and wall   Dimmable LED IP20 Bi-volt 50-60Hz
Application	Ceiling Lamps
Packaging	1 Box 0.42 m x 0.42 m x 0.25 m Gross weight 3 Net weight 2.7 Vol. 0.0441

Lighting effect

General Lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
 Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
 Spain / Portugal T +34 934 796 970

customer.service@vibia.com
 vibia.com

Funnel



VIBIA

2014

Design By undefined

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle.

Model Sheet

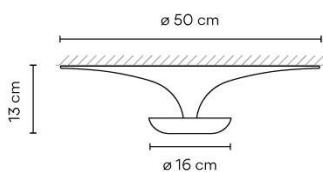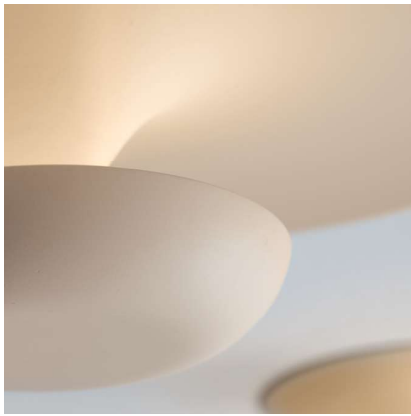

Finish	 10 White NCS S 0300-N
	 36 Soft Pink NCS S 1010-Y50R
	 47 Green L1 NCS S 4005-G80Y

LED temperature color 2700 K

Dimming DALI 1-10V Push
Optional Casambi
Min. quantity, upcharge and extra lead time apply [EN]



Installation type Surface Canopy

Materials Shade: Aluminum
Reflector: Aluminum
Wall plate: Steel

Light source 6 x LED 4,48W 350mA
E

LED CRI>90
2700 K

Driver CC - Constant Current 350
110-240 V 50/60 HZ

  **Dimmable** **LED**

IP20 **Bi-volt** **50-60Hz**

Application Ceiling Lamps

Packaging 1 Box
0.6 m x 0.6 m x 0.27 m
Gross weight 2.65
Net weight 2.1
Vol. 0.0972

Lighting effect


General Lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Other Applications



All of our products come with a five-year warranty.
Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com